

PARSEN



Guangzhou Parsen Industrial Technology Co.,Ltd.

Guangzhou · China



P erformance.....

A ccurate.....

R eliable.....

S table.....

SEN sor.....

PARSEN

A csensor manufacturing expert



Work together
to create a better future

| Company Profile >>

Guangzhou Parsen Industrial Technology Co., Ltd. is an independent enterprise integrating R&D, production, installation, sales and service. The company is located in the core area of Guangzhou Tianhe Smart City.

The company's key departments, such as R&D, production, installation, sales and after-sales, have a number of personnel engaged in industrial automation for many years.

After years of development, the company can provide customers with pressure meters, temperature meters, differential pressure meters, switches and alarm meters, wireless meters, flow meters, fluid level meters, monitoring and measuring instruments, signal interface instruments, solenoid valves, secondary Instruments, installation accessories and other products. Non-standard products can be customized according to the customer's on-site conditions.

According to the needs of the company's business development, the company has obtained "PARSEN" Chinese and English registered trademark, pattern approval certification, China metrology certification, CE certification, explosion-proof certification (Exd IIC T6 Gb), Intrinsically-safe certification (Exia IIC T6 Ga) and ISO9001:2015.




The company is a high quality supplier of Xichang launch test station of Xichang satellite launch center.

"Quality for survival, innovation for development, customer-oriented" is policy of the company.


The trust and support of new and old customers is inseparable from the development of the company, and it is also our constant driving force.

Guangzhou Parsen Industrial Technology Co., Ltd. welcomes your visit.

Certificates and trademarks of the company >>

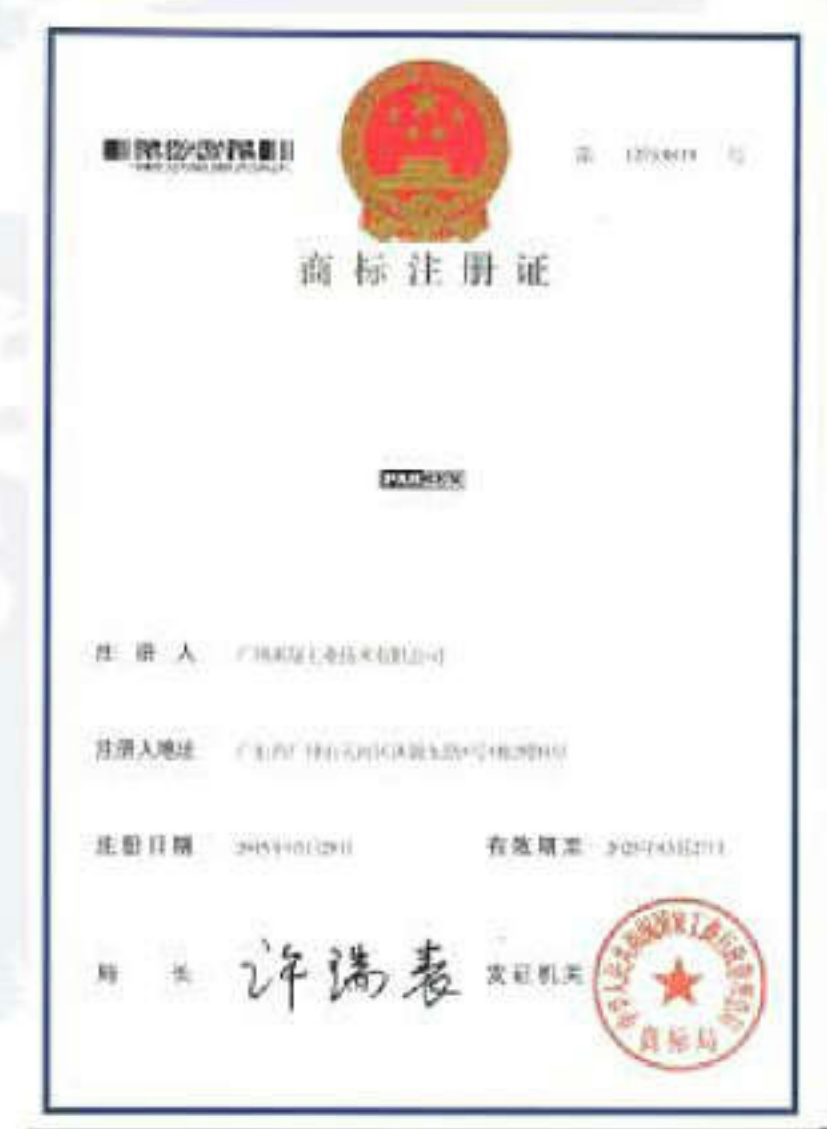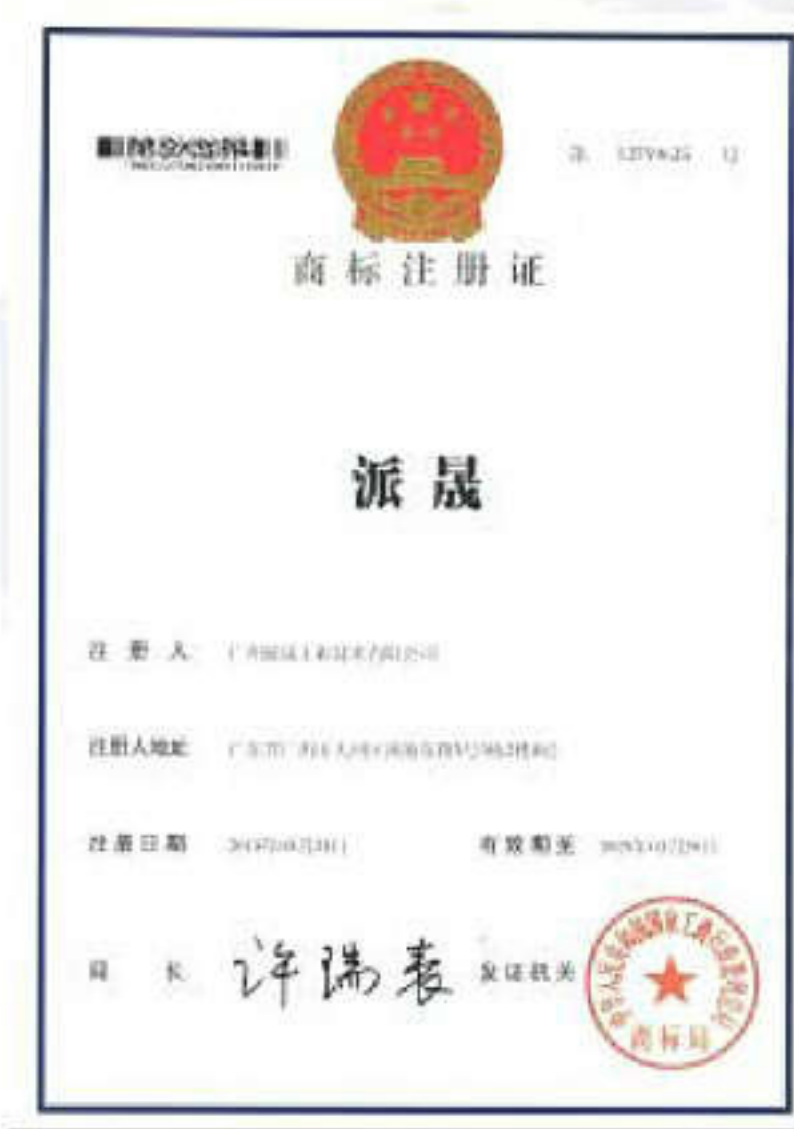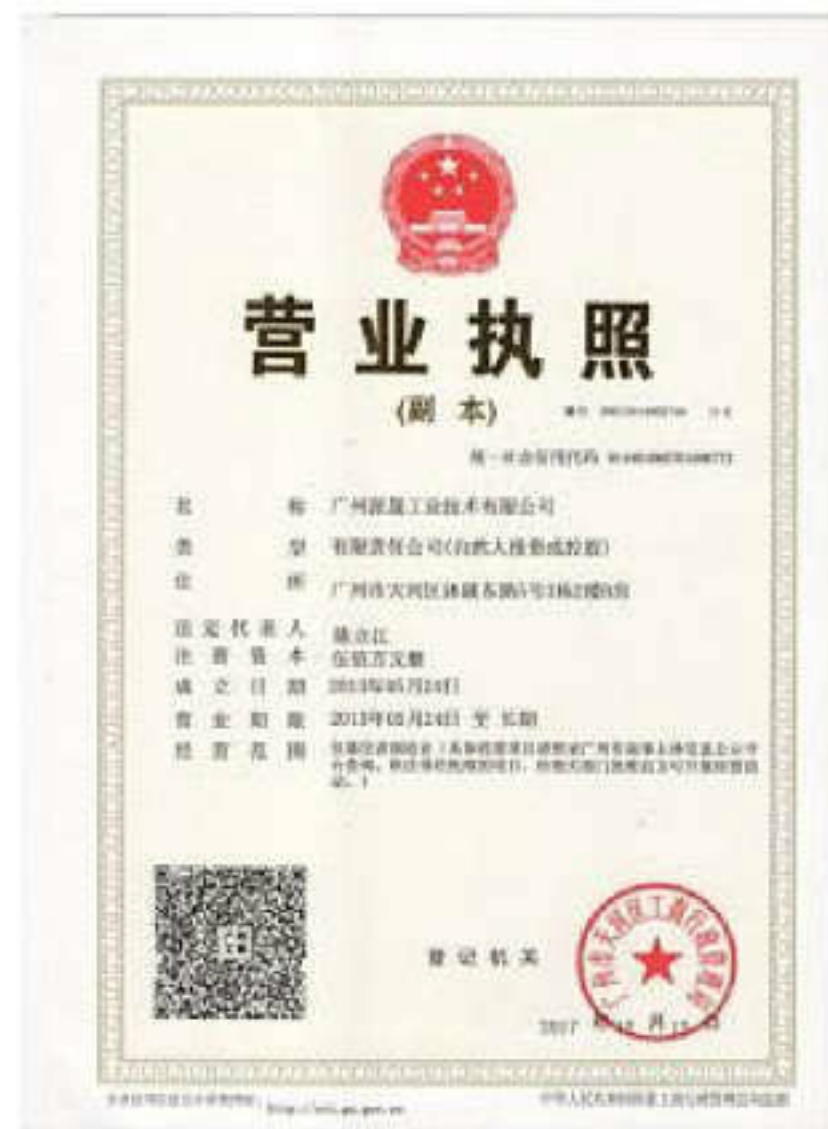

ISO certificate and Commendation from Xichang Satellite Launch Center >>

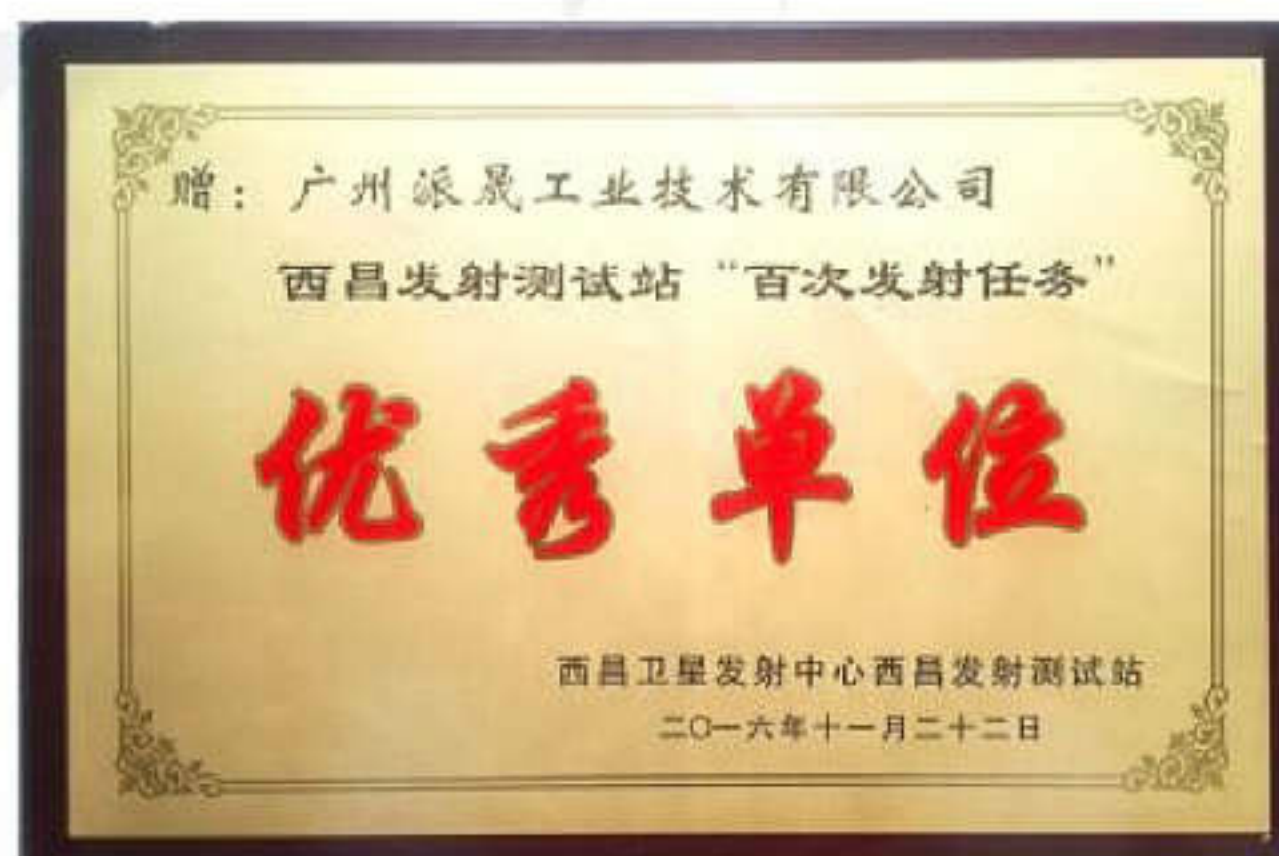

Explosion-proof certificates >>

CNEX 国家防爆

防爆电气设备 防爆合格证

编号: CNEx14-21729

送检单位: 广州德星工业技术有限公司
(地址: 广州市天河区岑村沙东村3号3楼3楼A区)
联系电话: 020-82012121

样品名称: 防爆配电箱

型号规格: PXS001, 200V, 4-20mA

防爆标志: Ex d IIC T4 Gb

产品标准: GB3836.1-2010

总装型号: CT0001

送检人: 李华

本证书有效期: 2014年1月20日至2016年1月19日

颁发日期: 2014年1月20日

中心主任: 李华

国家防爆电气产品质量监督检验中心

地址: 中国广东省广州市天河区岑村沙东村3号3楼3楼A区
电话: 020-82012121 传真: 020-82012122 网址: www.cnex.com.cn

注: 本证书的有效性依赖于送检单位的产品符合本证书的要求。送检单位应确保产品在有效期内符合本证书的要求。

CNEX 国家防爆

防爆电气设备 防爆合格证

编号: CNEx14-21729

送检单位: 广州德星工业技术有限公司
(地址: 广州市天河区岑村沙东村3号3楼3楼A区)
联系电话: 020-82012121

样品名称: 防爆配电箱

型号规格: PXS001, 200V, 4-20mA

防爆标志: Ex d IIC T4 Gb

产品标准: GB3836.1-2010

总装型号: CT0001

送检人: 李华

本证书有效期: 2014年1月20日至2016年1月19日

颁发日期: 2014年1月20日

中心主任: 李华

国家防爆电气产品质量监督检验中心

地址: 中国广东省广州市天河区岑村沙东村3号3楼3楼A区
电话: 020-82012121 传真: 020-82012122 网址: www.cnex.com.cn

注: 本证书的有效性依赖于送检单位的产品符合本证书的要求。送检单位应确保产品在有效期内符合本证书的要求。

CNEX 国家防爆

防爆电气设备 防爆合格证

编号: CNEx14-21729

送检单位: 广州德星工业技术有限公司
(地址: 广州市天河区岑村沙东村3号3楼3楼A区)
联系电话: 020-82012121

样品名称: 防爆配电箱

型号规格: PXS001, 200V, 4-20mA

防爆标志: Ex d IIC T4 Gb

产品标准: GB3836.1-2010

总装型号: CT0001

送检人: 李华

本证书有效期: 2014年1月20日至2016年1月19日

颁发日期: 2014年1月20日

中心主任: 李华

国家防爆电气产品质量监督检验中心

地址: 中国广东省广州市天河区岑村沙东村3号3楼3楼A区
电话: 020-82012121 传真: 020-82012122 网址: www.cnex.com.cn

注: 本证书的有效性依赖于送检单位的产品符合本证书的要求。送检单位应确保产品在有效期内符合本证书的要求。

CNEX 国家防爆

防爆电气设备 防爆合格证

编号: CNEx14-21729

送检单位: 广州德星工业技术有限公司
(地址: 广州市天河区岑村沙东村3号3楼3楼A区)
联系电话: 020-82012121

样品名称: 防爆配电箱

型号规格: PXS001, 200V, 4-20mA

防爆标志: Ex d IIC T4 Gb

产品标准: GB3836.1-2010

总装型号: CT0001

送检人: 李华

本证书有效期: 2014年1月20日至2016年1月19日

颁发日期: 2014年1月20日

中心主任: 李华

国家防爆电气产品质量监督检验中心

地址: 中国广东省广州市天河区岑村沙东村3号3楼3楼A区
电话: 020-82012121 传真: 020-82012122 网址: www.cnex.com.cn

注: 本证书的有效性依赖于送检单位的产品符合本证书的要求。送检单位应确保产品在有效期内符合本证书的要求。

Patent certificates >>

An anti-interference transmitter



A pressure transmitter suitable for frequent change of ambient temperature



A multi-point sampling temperature sensor for grain storage industry



An impact-resistant pressure transmitter for viscous and impurity medium



Pressure products >>

Standard DIN Pressure Transmitter	Standard Cable Pressure Transmitter	Standard Aviation Plug Pressure Transmitter
		
★ -1 to 0 bar, 0-2,500bar ★ Gauge pressure, Absolute pressure, Vacuum Pressure ★ 4-20 mA(2-wire); 0-5VDC, 0-10VDC or 1-5VDC(3-wire) ★ hydraulic, water conservancy, compressed air industry, testing equipment, etc.	★ -1 to 0 bar, 0-2,500bar ★ Gauge pressure, Absolute pressure, Vacuum Pressure ★ 4-20 mA(2-wire); 0-5VDC, 0-10VDC or 1-5VDC(3-wire) ★ hydraulic, water conservancy, compressed air industry, testing equipment, etc.	★ -1 to 0 bar, 0-2,500bar ★ Gauge pressure, Absolute pressure, Vacuum Pressure ★ 4-20 mA(2-wire); 0-5VDC, 0-10VDC or 1-5VDC(3-wire) ★ hydraulic, water conservancy, compressed air industry, testing equipment, etc.

Standard Pressure Transmitter with Display	Explosion-proof Pressure Transmitter	Stainless Steel Explosion-proof Pressure Transmitter
		
★ -1 to 0 bar, 0-2,500bar ★ Gauge pressure, Absolute pressure, Vacuum Pressure ★ 4-20 mA(2-wire); 1-5VDC(3-wire) ★ hydraulic, water conservancy, compressed air industry, testing equipment, etc.	★ -1 to 0 bar, 0-2,500bar ★ Gauge pressure, Absolute pressure, Vacuum Pressure ★ 4-20 mA(2-wire); 0-5VDC, 0-10VDC or 1-5VDC(3-wire) ★ gas, petroleum, chemical, explosion-proof testing equipment, etc.	★ -1 to 0 bar, 0-2,500bar ★ Gauge pressure, Absolute pressure, Vacuum Pressure ★ 4-20 mA(2-wire); 0-5VDC, 0-10VDC or 1-5VDC(3-wire) ★ gas, petroleum, chemical, explosion-proof testing equipment, etc.

Standard Industrial Pressure Transmitter	Explosion-proof Industrial Pressure Transmitter	Intelligent Industrial Pressure Transmitter
		
★ -1 to 0 bar, 0-2,500bar ★ Gauge pressure, Absolute pressure, Vacuum Pressure ★ 4-20 mA(2-wire); 0-5VDC, 0-10VDC or 1-5VDC(3-wire) ★ testing equipment, hydraulic, boiler, environmental protection industry, etc.	★ -1 to 0 bar, 0-2,500bar ★ Gauge pressure, Absolute pressure, Vacuum Pressure ★ 4-20 mA(2-wire); 0-5VDC, 0-10VDC or 1-5VDC(3-wire) ★ gas, petroleum, chemical industry, explosion-proof testing equipment, etc.	★ -1 to 0 bar, 0-2,500bar ★ Gauge pressure, Absolute pressure, Vacuum Pressure ★ 4-20 mA(2-wire) ★ Hart, CAN bus, Modbus RTU protocol ★ testing equipment, petroleum, chemical, gas industry, etc.

Pressure Products >>

Liquid Level Pressure Transmitter	Anti-corrosion Liquid Level Pressure Transmitter	Flanged Anti-corrosion Liquid Level Pressure Transmitter
		
★ 0~1mH₂O, 0 to 100mH₂O ★ Gauge pressure ★ 4~20 mA(2-wire); 0~5VDC, 0~10VDC or 1~5VDC(3-wire) ★ water conservancy, environmental protection, chemical industry, etc.	★ 0~1mH₂O, 0 to 100mH₂O ★ Gauge pressure ★ 4~20 mA(2-wire); 0~5VDC, 0~10VDC or 1~5VDC(3-wire) ★ water conservancy, environmental protection, chemical industry, etc.	★ 0~1mH₂O, 0 to 100mH₂O ★ Gauge pressure ★ 4~20 mA(2-wire); 0~5VDC, 0~10VDC or 1~5VDC(3-wire) ★ water conservancy, environmental protection, chemical industry, etc.

Flush Diaphragm Pressure Transmitter	Stainless Steel Flush Diaphragm Pressure Transmitter	DIN Flush Diaphragm Pressure Transmitter
		
★ 0 to 16 bar, 0~1,200bar ★ Gauge pressure ★ 4~20 mA(2-wire); 0~5VDC, 0~10VDC or 1~5VDC(3-wire) ★ Oil industry, mud, etc.	★ 0 to 16 bar, 0~1,200bar ★ Gauge pressure ★ 4~20 mA(2-wire); 0~5VDC, 0~10VDC or 1~5VDC(3-wire) ★ Oil industry, mud, etc.	★ -1 to 0 bar, 0~600bar ★ Gauge pressure, Absolute pressure, Vacuum pressure ★ 4~20 mA(2-wire); 0~5VDC, 0~10VDC or 1~5VDC(3-wire) ★ food, pharmaceutical, chemical, environmental protection industry, etc.

Threaded Hammer Union Pressure Transmitter	Flush Diaphragm Hammer Union Pressure Transmitter	Flanged Flush Diaphragm Pressure Transmitter
		
★ 0 to 350 bar, 0~1,350bar ★ Gauge pressure ★ 4~20 mA(2-wire) ★ Oil, mud, etc.	★ 0 to 350 bar, 0~1,350bar ★ Gauge pressure ★ 4~20 mA(2-wire) ★ Oil, mud, etc.	★ 0 to 16 bar, 0~400bar ★ Gauge pressure ★ 4~20 mA(2-wire); 0~5VDC, 0~10VDC or 1~5VDC(3-wire) ★ Oil, mud, etc.

Pressure products and alarm controllers >>

Sanitary Tri-Clamp Pressure Transmitter  ★ 0 to 0.7 bar, 0-100bar ★ Gauge pressure, Absolute pressure ★ 4-20 mA(2-wire); 0-5VDC, 0-10VDC or 1-5VDC(3-wire) ★ Food, pharmaceutical, chemical, environmental protection industry, etc.	Industrial Sanitary Tri-Clamp Pressure Transmitter  ★ 0 to 0.7 bar, 0-100bar ★ Gauge pressure, Absolute pressure ★ 4-20 mA(2-wire); 0-5VDC, 0-10VDC or 1-5VDC(3-wire) ★ Food, pharmaceutical, chemical, environmental protection industry, etc.	Flanged Sanitary Pressure Transmitter  ★ 0 to 0.2 bar, 0-100bar ★ Gauge pressure, Absolute pressure ★ 4-20 mA(2-wire); 0-5VDC, 0-10VDC or 1-5VDC(3-wire) ★ Food, pharmaceutical, chemical, environmental protection industry, etc.
Air Conditioning Pressure Transmitter  ★ -1 to 0 bar, 0-100bar ★ Gauge pressure, Absolute pressure ★ 4-20 mA(2-wire); 0-5VDC, 0-10VDC or 1-5VDC(3-wire) ★ Air conditioner, compressor, etc.	High Temperature Pressure Transmitter  ★ -1 to 0 bar, 0-2,500bar ★ Gauge pressure, Absolute pressure, Vacuum Pressure (Temperature resistance up to 150 °C) ★ 4-20 mA(2-wire); 0-5VDC, 0-10VDC or 1-5VDC(3-wire) ★ Boiler, chemical industry, etc.	High Temperature Pressure Transmitter with LEMO Connector  ★ -1 to 0 bar, 0-2,500bar ★ Gauge pressure, Absolute pressure, Vacuum Pressure (Temperature resistance up to 150 °C) ★ 4-20 mA(2-wire); 0-5VDC, 0-10VDC or 1-5VDC(3-wire) ★ Boiler, chemical industry, etc.
Temperature Alarm Controller  ★ -200°C to 500°C(-328° F to 932° F) ★ 4-20 mADC, analog signal or Switching signal ★ boiler, gas, petroleum, chemical, pharmaceutical, grain, testing equipment, food, hydraulic industry, etc.	Pressure Alarm Controller  ★ -1 to 0 bar, 0-2,500bar ★ 4-20 mADC, analog signal or Switching signal ★ boiler, gas, petroleum, chemical, pharmaceutical, testing equipment, hydraulic industry, etc.	Differential Pressure Alarm Controller  ★ 0 to 0.05 bar, 0-25bar ★ 4-20 mADC, analog signal or Switching signal ★ boiler, gas, petroleum, chemical, pharmaceutical, grain, testing equipment, food, hydraulic industry, etc.

Temperature Products >>

Compact Sensor  ★ resistance thermometer ★ -50°C to 150°C (-58° F to 302° F) ★ 4-20 mA(2-wire);PT100,0-5VDC, 0-10VDC or 1-5VDC(3-wire) ★ Boiler, gas, petroleum, chemical, pharmaceutical, environmental protection, grain, testing equipment, food, hydraulic industry, etc.	Stainless Steel Compact Sensor  ★ resistance thermometer ★ -50°C to 350°C (-58° F to 662° F) ★ 4-20 mA(2-wire);PT100(3-wire) ★ Boiler, gas, petroleum, chemical, pharmaceutical, environmental protection, grain, testing equipment, food, hydraulic industry, etc.	Clamp Sensor  ★ resistance thermometer ★ -50°C to 350°C (-58° F to 662° F) ★ 4-20 mA(2-wire);PT100(3-wire) ★ Boiler, gas, petroleum, chemical, pharmaceutical, environmental protection, grain, testing equipment, food, hydraulic industry, etc.
Moisture Proof Temperature Sensor  ★ resistance thermometer or thermocouple ★ -200°C to 1,300°C (-328° F to 2,372° F) ★ thermocouple,4-20 mA(2-wire); PT100(3-wire) ★ testing equipment, boiler, gas, petroleum, chemical, grain, steel, pharmaceutical, cement, hydraulic industry, garbage incineration, etc.	Explosion-Proof Temperature Sensor  ★ resistance thermometer or thermocouple ★ -200°C to 1,300°C (-328° F to 2,372° F) ★ thermocouple,4-20 mA(2-wire); PT100(3-wire) ★ testing equipment, boiler, gas, petroleum, chemical, grain, steel, pharmaceutical, cement, hydraulic industry, garbage incineration, etc.	Industrial Temperature Sensor with Display  ★ resistance thermometer or thermocouple ★ -200°C to 1,300°C (-328° F to 2,372° F) ★ thermocouple,4-20 mA(2-wire); PT100(3-wire) ★ testing equipment, boiler, gas, petroleum, chemical, grain, steel, pharmaceutical, cement, hydraulic industry, garbage incineration, etc.
Tri-clamp Temperature Sensor  ★ resistance thermometer or thermocouple ★ -200°C to 1,300°C (-328° F to 2,372° F) ★ thermocouple,4-20 mA(2-wire); PT100(3-wire) ★ Boiler, gas, petroleum, chemical, pharmaceutical, grain, testing equipment, food, hydraulic industry, etc.	Wall Mounted Temperature Sensor  ★ resistance thermometer or thermocouple ★ -200°C to 1,300°C (-328° F to 2,372° F) ★ thermocouple,4-20 mA(2-wire); PT100(3-wire) ★ laboratory, environmental air testing, etc.	Intelligent Industrial Temperature Sensor  ★ resistance thermometer or thermocouple ★ -200°C to 1,300°C (-328° F to 2,372° F) ★ thermocouple,4-20 mA(2-wire); PT100(3-wire); Hart, CAN bus, Modbus RTU protocol ★ testing equipment, boiler, gas, petroleum, chemical, grain, steel, pharmaceutical, cement, hydraulic industry, etc.

Intelligent Products >>

Intelligent Pressure Transmitter  ★ -1 to 0 bar, 0-400 bar ★ Gauge pressure, Vacuum Pressure ★ 4-20 mA(2-wire), HART Protocol ★ Boiler, gas, petroleum, chemical, hydraulic, testing equipment, garbage incineration, steel, cement industry, etc	High Static Pressure Intelligent Differential Pressure Transmitter  ★ -1 to 0 bar, 0-68.9bar ★ High static pressure up to 300bar ★ Differential pressure ★ 4-20 mA(2-wire), HART Protocol ★ Boiler, gas, petroleum, chemical, hydraulic, testing equipment, garbage incineration, steel, cement industry, etc	Intelligent Absolute Pressure Transmitter  ★ 0 to 0.002 bar, 0-68.9bar ★ Absolute pressure ★ 4-20 mA(2-wire), HART Protocol ★ Boiler, gas, petroleum, chemical, hydraulic, testing equipment, garbage incineration, Trade settlement, etc.
Insertion Intelligent Pressure Transmitter  ★ 0 to 0.01 bar, 0-6.9 bar ★ Gauge pressure ★ 4-20 mA(2-wire), HART Protocol ★ Boilers, petroleum, chemical, pharmaceutical industry, testing equipment, etc.	Single Flange Intelligent Pressure Transmitter  ★ 0 to 0.01 bar, 0-6.9 bar ★ Gauge pressure ★ 4-20 mA(2-wire), HART Protocol ★ Boilers, petroleum, chemical, pharmaceutical industry, testing equipment, etc.	Tri-clamp Intelligent Pressure Transmitter  ★ 0 to 0.01 bar, 0-6.9 bar ★ Gauge pressure, Absolute pressure, Vacuum Pressure ★ 4-20 mA(2-wire), HART Protocol ★ Boilers, petroleum, chemical, pharmaceutical industry, testing equipment, etc.
Insertion Intelligent Differential Pressure Transmitter  ★ 0 to 0.01 bar, 0-6.9bar ★ Differential pressure ★ 4-20 mA(2-wire), HART Protocol ★ Reactor, petroleum, chemical, pharmaceutical industry, test equipment, etc.	Double Flange Intelligent Differential Pressure Transmitter  ★ 0 to 0.01 bar, 0-6.9bar ★ Differential pressure ★ 4-20 mA(2-wire), HART Protocol ★ Reactor, petroleum, chemical, pharmaceutical industry, test equipment, etc.	Tri-clamp Intelligent Differential Pressure Transmitter  ★ 0 to 0.01 bar, 0-6.9bar ★ Differential pressure ★ 4-20 mA(2-wire), HART Protocol ★ Food, pharmaceutical industry, etc.

Flowmeter Products >>

Split Electromagnetic Flowmeter  ★ DN6 to DN3000 ★ Medium: conductivity greater than 20 μ s/cm ★ flanged, threaded, clamp, insertion and tri-clamp ★ water conservancy, food, medicine, chemical industry, boilers, etc.	Integrated Electromagnetic Flowmeter with Display  ★ DN6 to DN3000 ★ Medium: conductivity greater than 20 μ s/cm ★ flanged, threaded, clamp, insertion and tri-clamp ★ water conservancy, food, medicine, chemical industry, boilers, etc.	Battery Powered Electromagnetic Flowmeter  ★ DN6 to DN800 ★ Medium conductivity greater than 20 μ s/cm ★ flanged, tri-clamp, threaded, clamp ★ food, medicine, chemical industry, boilers, etc.
Vortex Flowmeter  ★ DN15 to DN300 ★ fluid, gas, steam ★ flanged, tri-clamp, threaded, clamp ★ Water conservancy, environmental protection, medicine, chemical industry, boilers, etc.	Insertion Vortex Flowmeter  ★ DN15 to DN300 ★ fluid, gas, steam ★ Water conservancy, environmental protection, medicine, chemical industry, boilers, etc.	Vortex Flowmeter with Temperature and Pressure Compensation  ★ DN15 to DN300 ★ fluid, gas, steam ★ flanged, tri-clamp, threaded, clamp ★ Water conservancy, environmental protection, medicine, chemical industry, boilers, etc.
Turbine Flowmeter  ★ DN4 to DN200 ★ Medium: fluid, gas ★ Material: 304, 316 stainless steel ★ MODbus-RTU, Hart	Metal Tube Flowmeter  ★ DN15 to DN200 ★ Medium: fluid, gas ★ Material: 304, 316L stainless steel, PTFE lined ★ MODbus-RTU, Hart	Mass Flowmeter  ★ DN3 to DN250 ★ Medium: fluid, gas ★ Material: 304, 316 stainless steel, PTFE lined, titanium ★ MODbus-RTU, Hart

Level Meter Products >>

Magnetic Level Gauge	Liquid Level Switch	Capacitance Level Gauge
		
★ Flap rotation angle: 360 degree, 180 degree. ★ top mounted, Side-mounted ★ flanged connection, tri-clamp connection ★ General type, anti-corrosion type	★ A variety of floats are available ★ top mounted, Side-mounted ★ flanged connection, threaded connection ★ General type, anti-corrosion type	★ Range: 0 to 3m ★ top mounted ★ flanged connection, threaded connection ★ lubricating oil, liquid gas, etc.

Ultrasonic Level Gauge	Magnetostrictive Level Gauge	Radar Level Gauge
		
★ top mounted ★ flanged connection, threaded connection ★ 4-20 mA(2-wire) ★ Water conservancy, power, mining, pharmaceutical, chemical industry, etc.	★ top mounted, Side-mounted ★ flanged connection, threaded connection ★ 4-20 mA(2-wire) ★ Water conservancy, petroleum, food, medicine, chemical industry, etc.	★ top mounted ★ flanged connection, threaded connection ★ 4-20 mA(2-wire) ★ oil field, water conservancy, food, pharmaceutical, chemical industry, etc.

Tuning Fork Level Switch	Level Gauge	RF Admittance Level Gauge
		
★ top mounted, Side-mounted ★ flanged connection, threaded connection ★ switching signal ★ mining, environmental protection, food, pharmaceutical, chemical industry, etc.	★ Side-mounted ★ flanged connection, tri-clamp connection ★ 4-20 mA (2-wire) HART ★ environmental protection, food, pharmaceutical, chemical industry, etc	★ top mounted ★ flanged connection, tri-clamp connection ★ 4-20 mA(2-wire), switching signal ★ Boiler, water conservancy, food, pharmaceutical, chemical industry, etc.

Modules & Wireless Products >>

Passive Isolator  ★ Single channel, dual channel ★ 1 input, 1 output, no external power supply required ★ Field of thunder, leakage site	Lightning Protection Isolator  ★ Input end Lightning protection, output End Lightning protection ★ 1 input, 1 output; 1 input, 2 output (2-wire and 4-wire universal) ★ Field of thunder, leakage site	Distribution Equipment  ★ Single channel ★ Universal for 2-wire and 4-wire instruments ★ Field of thunder, leakage site
Safety Barrier  ★ Single channel, dual channel ★ 1 input, 1 output or 1 input, 2 output ★ Switching signal input, analog output; switching signal input, switching signal output; RTD or thermocouple Input, analog output; MODBUS-RTU input, MODBUS-RTU output ★ Safety explosion-proof site (Exia Ga IIC)	Rail Mount Temperature Transmitter Module  ★ 1 set input, 1 set output ★ RTD input or thermocouple Input ★ RTD output or 4-20mA output or 4-20mA output + Hart protocol	Head-Mount Temperature Transmitter Module  ★ 1 set input, 1 set output ★ Economical, isolated and intelligent type ★ RTD input or thermocouple Input ★ 4-20mA output or 4-20mA output + Hart protocol or MODBUS-RTU output
Wireless Pressure Products  ★ 3.6VDC Power supply or 24VDC power supply ★ GPRS, NB-IoT ★ Base station positioning, GPRS positioning, wake-up call at any time, ambient temperature display.	Wireless Temperature Products  ★ 3.6VDC Power supply or 24VDC power supply ★ GPRS, NB-IoT ★ Base station positioning, GPRS positioning, wake-up call at any time, ambient temperature display.	Wireless Differential Pressure Products  ★ 3.6VDC Power supply or 24VDC power supply ★ GPRS, NB-IoT ★ Base station positioning, GPRS positioning, wake-up call at any time, ambient temperature display.

Solenoid valve >>

Explosion-proof Solenoid Valve  ★ normally open (NO), normally closed (NC), Self-holding ★ 0 to 2,000 bar pressure ★ Terminal block type, lead type ★ Cast steel, brass, aluminum, PTFE, stainless steel	Direct Acting Solenoid Valve  ★ normally open (NO), normally closed (NC), Self-holding ★ 0 to 6 bar pressure ★ Terminal block type, lead type, plug type ★ Brass, aluminum, PTFE, stainless steel	High Temperature Solenoid Valve  ★ normally open (NO), normally closed (NC), Self-holding ★ 0 to 25 bar pressure ★ Terminal block type, lead type, plug type ★ Cast steel, stainless steel
Low Temperature Solenoid Valve  ★ normally open (NO), normally closed (NC) ★ 0 to 64 bar pressure ★ Terminal block type, lead type, plug type ★ Brass, stainless steel	Anticorrosive Solenoid Valve  ★ normally open (NO), normally closed (NC), Self-holding ★ 0 to 16 bar pressure ★ Terminal block type, lead type, plug type ★ PTFE, PVC, ABS747, 316SS	Submersible Solenoid Valve  ★ normally open (NO), normally closed (NC), Self-holding ★ 0 to 100 bar pressure ★ lead type ★ Cast steel, stainless steel
Gas Solenoid Valve  ★ normally open (NO), normally closed (NC), Self-holding ★ 0 to 16 bar pressure ★ Terminal block type, lead type, plug type ★ Cast steel, stainless steel	Vacuum Solenoid Valve  ★ normally open (NO), normally closed (NC), Self-holding ★ -1 to 1 bar pressure ★ Terminal block type, lead type, plug type ★ Brass, PTFE, stainless steel	3/2 way Solenoid Valve  ★ normally open (NO), normally closed (NC) ★ 0 to 200 bar pressure ★ Terminal block type, lead type, plug type ★ Cast steel, brass, aluminum, PTFE, stainless steel

Other products >>

Pressure Gauge	Vibration Proof Pressure Gauge	Diaphragm Pressure Gauge
		
★ Dial diameter: 60mm, 100mm, 150mm ★ -1 to 0 bar, 0-600bar ★ Accuracy: 1.6%, 2.5% ★ Power, petroleum, chemical, gas, hydraulic industry, etc.	★ Dial diameter: 60mm, 100mm, 150mm ★ -1 to 0 bar, 0-600bar ★ Accuracy: 1.6%, 2.5% ★ Power, petroleum, chemical, gas, hydraulic industry, etc.	★ Dial diameter: 100mm, 150mm ★ 0 to 1 bar, 0-25bar ★ Accuracy: 2.5% ★ Food, pharmaceutical, chemical, environmental protection industry, etc.

Back Connect Bimetal Thermometer	Bottom Connect Bimetal Thermometer	Universal Bimetal Thermometer
		
★ Dial diameter: 60mm, 100mm, 150mm ★ -50 to 200°C (-58° F to 392° F) ★ Accuracy: 1.6%, 2.5% ★ power, petroleum, chemical, gas, hydraulic industry, etc.	★ Dial diameter: 60mm, 100mm, 150mm ★ -50 to 200°C (-58° F to 392° F) ★ Accuracy: 1.6%, 2.5% ★ Power, petroleum, chemical, gas, hydraulic industry, etc.	★ Dial diameter: 60mm, 100mm, 150mm ★ -50 to 200°C (-58° F to 392° F) ★ Accuracy: 1.6%, 2.5% ★ Power, petroleum, chemical, gas, hydraulic industry, etc.

Gas Detector	Conductivity Meter	PH Meter
		
★ Detectable gas: oxygen, acetylene, phosphine, hydrogen sulfide, etc. ★ 4-20mA, MODBUS-RTU, Switching signal ★ Electricity, petroleum, chemical, gas, food industry, etc.	★ G1/2 threaded connection ★ 4-20mA, MODBUS-RTU, Switching signal ★ electronics, chemical, pharmaceutical, electromechanical, nuclear, environmental, food industry, etc.	★ G3/4 threaded connection ★ 4-20mA, MODBUS-RTU, Switching signal ★ urban sewage treatment plant, chemical, printing and dyeing, paper, pharmaceutical electroplating, environmental protection industry, etc.

Non-standard customized products >>

Non-standard Custom Small Pressure Transmitter 	Non-standard Custom Transmitter with PARK Connector 	Non-standard Custom Compact Transmitter 
Non-standard Customized Economical Pressure Transmitter 	Non-standard Customized Economical Temperature Transmitter 	Non-standard Customized Economical Module Transmitter 
Non-standard Custom Explosion-proof Pressure Transmitter 	Non-standard Custom Small Differential Pressure Transmitter 	Non-standard Custom Differential Pressure Transmitter 
Non-standard Custom Pressure Switch with Slant Four-digit LED Display 	Non-standard Custom Pressure Switch with Rectangle Four-digit LED Display 	Non-standard Custom Pressure Switch with Circular Four-digit LED Display 

Accessories >>

Radiator 	Radiator overflow tank 	Curved Radiator Tube 
Mount Casing 	Mount Base 	Mount Bracket 
Shut-off Valve 	Two Valve Manifold 	Three Valve Manifold 
Five Valve Manifold 	Kidney-shaped Connector 	Pressure Connector 



Guangzhou Parsen Industrial Technology Co., Ltd.

Telephone: +86-020-32031043

Fax: +86-020-80720403

Website: <http://www.parsen.com.cn>

email: sales@parsen.com.cn

Address: 2nd Floor, Building 3, MuBei Industrial Park,
No. 5, MuBei East Road, Tianhe District, Guangzhou,
Guangdong, China

Zip code: 510663

The contents of this manual are for reference. If you need to purchase the product,
please contact us to determine the model selection.